


May 2020, Bytom / Poland

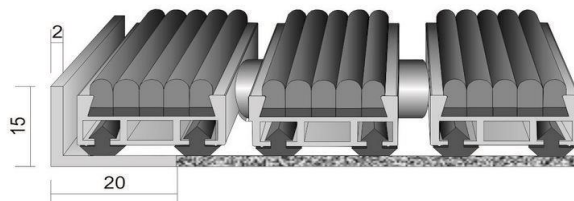

CLASSIC aluminium mat with felt, height 11-13 mm

Technical data

Description	Flat aluminium profiles with felt. Roll-up, easy to clean. Stops dirt in spaces between profiles and absorbs moisture.
Application	Applicable only to the inside. Suitable for zones with little pedestrian traffic (up to 50 people a day) - offices, hotels, banks. The necessary requirement for long life is the use of an external mat at the entrances.
Materials	<p>Support profiles: aluminium / height 9 mm x width 24mm / Standard EN - 573 - 3</p> <p>Insert: felt - durable polypropylene Standards EN 14041; EN 13297</p> <p>Features: Standard EN 13501-1; on request non-flammable felt with parameters of Cfl – s1</p> <p>Connector of elements: stainless steel line Ø 1,8 mm, every 20 cm, the minimum tensile strength of 1.82 kN / Standard EN 12385-4</p> <p>Connecting element: chrome-plated brass cylinder with clamping screw/ DIN EN ISO 9001: 2000</p> <p>Spacers: rubber of 5mm or 3mm thickness / Standard BN-80 / 6613-04</p> <p>Backing: acoustic foam for indoor / ISO 9001: 2008</p>
Dimensions	<p>Height: 11 mm – without backing 13 mm – with backing</p> <p>Weight: 10 kg/m²</p>
Colours	<p>Support profile: natural aluminium</p> <p>Felt: anthracite, grey, blue, brown, sand</p>
Adhesive	sealant based on polyurethane /Standard MAK (Max. Arbeitsplatz-Konzentration)
Permissible load	600 kg/1dm ²
Attestation	PZH no. HK/B/1001/01/2017 (National Institute of Public Health, Warsaw, Poland); slip resistance - R 10 (KI Keramik- Institut GmbH, Meissen, Germany no. RH545-14-2)