


May 2020, Bytom / Poland

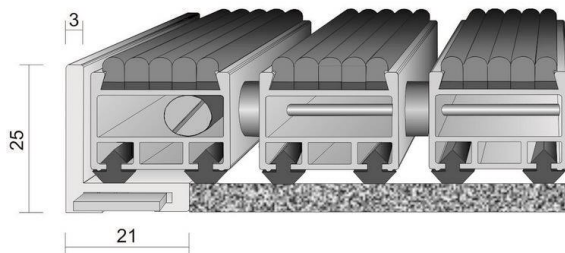

## CLASSIC aluminium mat with felt, height 20-22 mm

### Technical data

---

#### Description

Flat aluminium profiles with felt. Roll-up, easy to clean. Stops very large amounts of dirt in spaces between profiles and absorbs moisture.

#### Application

Recommended only for internal entrance areas. Entrances with medium pedestrian traffic (up to 500 people daily). In order to maintain high performance characteristics, it is recommended to use it together with an external mat that reduces access of moisture to the interior.

#### Materials

Support profiles:	aluminium / height 17mm x width 24mm / Standard EN-573-3
Insert:	felt - durable polypropylene / Standards EN 14041; EN 13297
Features:	Standard EN 13501-1; on request non-inflammable felt with parameters of Cfl – s1
Connector of elements:	stainless steel line Ø 3mm, every 30 cm, the minimum tensile strength of 5.06 kN / Standard EN 12385-4
Connecting element:	chrome-plated brass cylinder with clamping screw/ DIN EN ISO 9001: 2000
Spacers:	rubber of 5mm or 3mm thickness / Standard BN-80 / 6613-04
Backing:	acoustic foam for indoor / ISO 9001: 2008

#### Dimensions

Height:	20 mm – without backing 22 mm – with backing
Weight:	14 kg/m <sup>2</sup>

#### Colours

Support profile:	natural aluminium
Felt:	anthracite, grey, teal blue, brown, sand

#### Adhesive

sealant based on polyurethane /Standard MAK (Max. Arbeitsplatz-Konzentration )

#### Permissible load

1500 kg/1 dm<sup>2</sup>

#### Attestation

PZH no. HK/B/1001/01/2017 (National Institute of Public Health, Warsaw, Poland); slip resistance - R 10 (KI Keramik- Institut GmbH, Meissen, Germany no. RH545-14-2)